

Wound Chip Baluns

ATB Series

Type: **ATB3225-75011CT (3.2×2.5×2.3mm)**
 ATB3225-75032CT (3.2×2.5×2.3mm)
 ATB3225-75034CT (3.2×2.5×2.3mm)

Issue date: June 2012

- All specifications are subject to change without notice.
 - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

Wound Chip Baluns

Conformity to RoHS Directive

ATB Series ATB3225-75011CT


FEATURES

- Case size of ATB3225 is L3.2×W2.5×H2.3mm.
- This case size is smaller than traditional Balun.
- Frequency band width is 5 to 200MHz.
- Low insertion loss and good balance parameter.
- It is a product conforming to RoHS directive.


APPLICATIONS

Cable modems


SHAPES AND DIMENSIONS

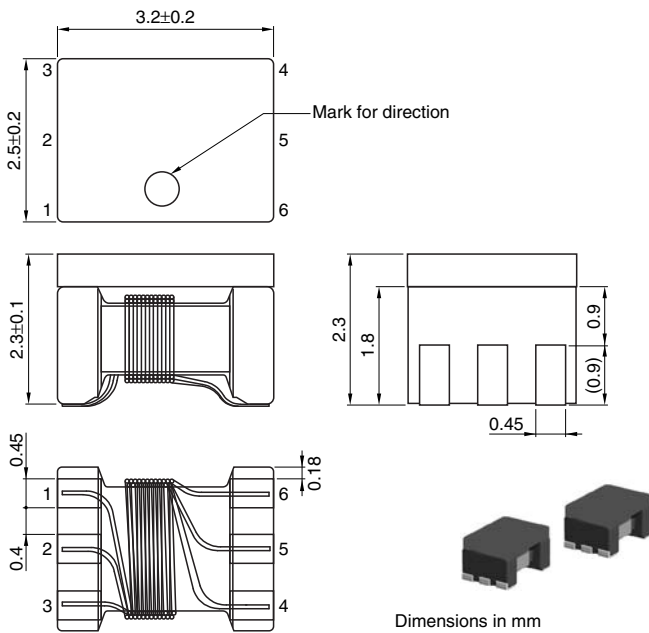

RECOMMENDED PC BOARD PATTERN

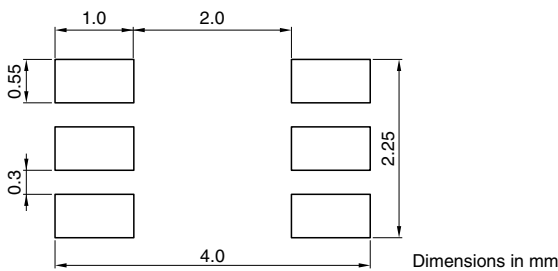

CIRCUIT DIAGRAM

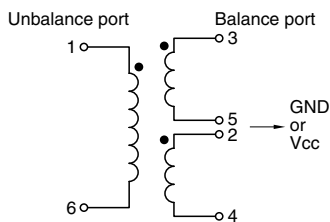

PRODUCT IDENTIFICATION


ATB	3225	-	750	11	CT
(1)	(2)	(3)	(4)	(5)	

- (1) Series name
- (2) Case size
- (3) Impedance[at 100MHz]
750: 75Ω
- (4) Impedance ratio
11 → 1:1
- (5) Type
CT: Center tap


TEMPERATURE RANGES

Operating	-25 to +85°C
Storage(After mount)	-25 to +85°C

RECOMMENDED SOLDERING CONDITIONS RECOMMENDED TEMPERATURE PROFILE FOR LEAD-FREE SOLDER

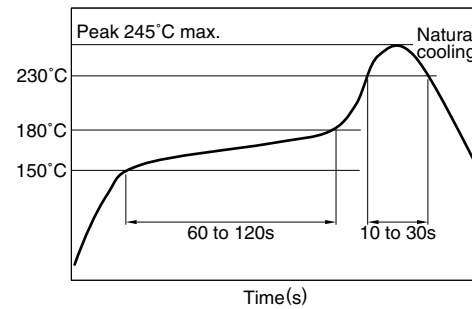

REFLOW PROFILE FOR SOLDER HEAT RESISTANCE

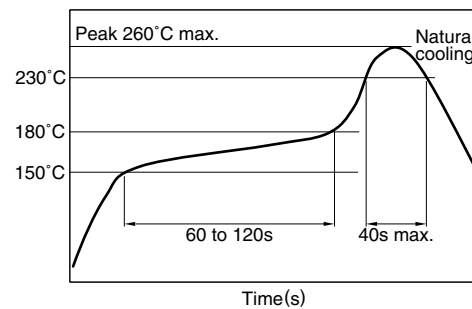

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS


Part No.	DC resistance (Ω)max.	Impedance ratio	Frequency range (MHz)	Insertion loss (dB)		Return loss (dB)min.	Amplitude unbalance (dB)max.	Phase unbalance (deg.)
				typ.	max.			
ATB3225-75011CT	0.7	1:1 (75 Ω :75 Ω)	5 to 200	0.8	1.5	10	0.5	180 \pm 5

FREQUENCY CHARACTERISTICS


INSERTION LOSS

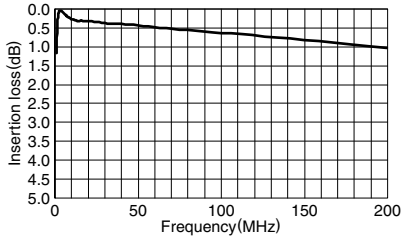


RETURN LOSS

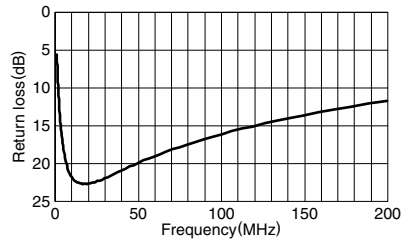

AMPLITUDE UNBALANCE

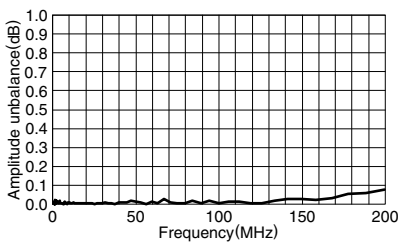

PHASE UNBALANCE

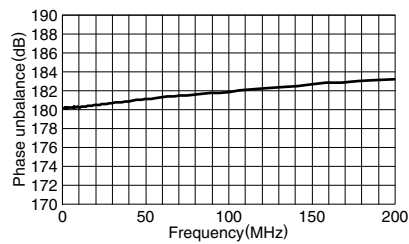

Wound Chip Baluns

Conformity to RoHS Directive

ATB Series ATB3225-75032CT


FEATURES

- Case size of ATB3225 is L3.2×W2.5×H2.3mm.
- This case size is smaller than traditional Balun.
- Frequency band width is 5 to 100MHz.
- Low insertion loss and good balance parameter.
- It is a product conforming to RoHS directive.

APPLICATIONS


Cable modems

SHAPES AND DIMENSIONS

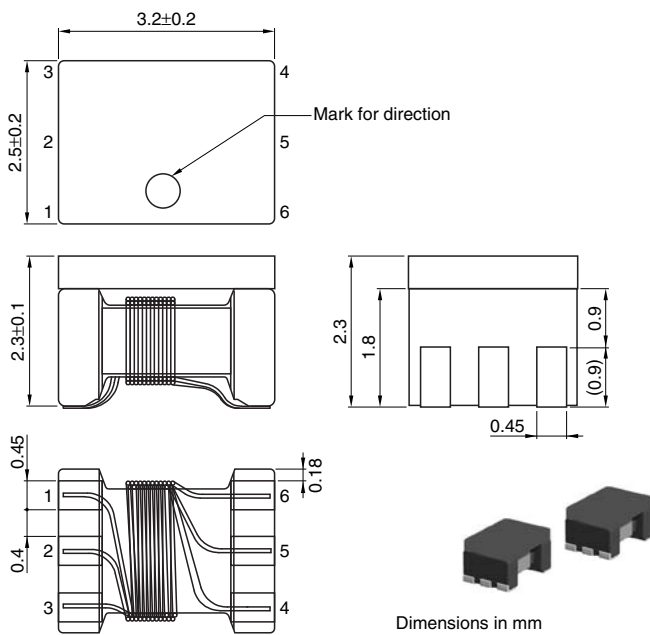


Dimensions in mm

RECOMMENDED PC BOARD PATTERN

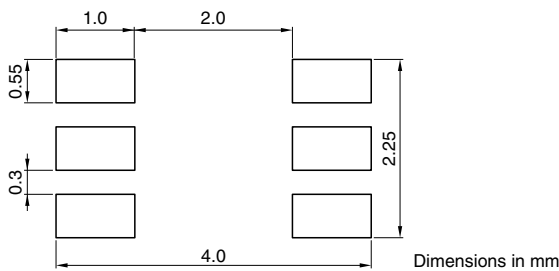

Dimensions in mm

CIRCUIT DIAGRAM

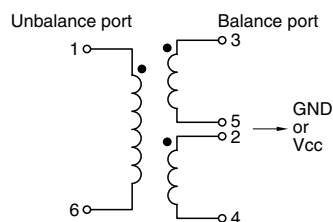

PRODUCT IDENTIFICATION


ATB	3225	-	750	32	CT
(1)	(2)	(3)	(4)	(5)	

- (1) Series name
- (2) Case size
- (3) Impedance[at 100MHz]
750: 75Ω
- (4) Impedance ratio
32 → 3:2
- (5) Type
CT: Center tap


TEMPERATURE RANGES

Operating	-25 to +85°C
Storage(After mount)	-25 to +85°C

RECOMMENDED SOLDERING CONDITIONS RECOMMENDED TEMPERATURE PROFILE FOR LEAD-FREE SOLDER

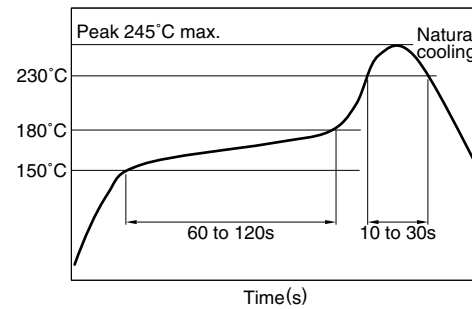

REFLOW PROFILE FOR SOLDER HEAT RESISTANCE

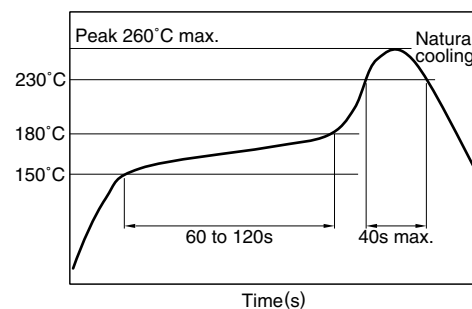

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS


Part No.	DC resistance (Ω)max.	Impedance ratio	Frequency range (MHz)	Insertion loss (dB)		Return loss (dB)min.	Amplitude unbalance (dB)max.	Phase unbalance (deg.)
				typ.	max.			
ATB3225-75032CT	0.7	3:2 (75 Ω :50 Ω)	5 to 100	0.8	2	5	1	180 \pm 10

FREQUENCY CHARACTERISTICS


INSERTION LOSS

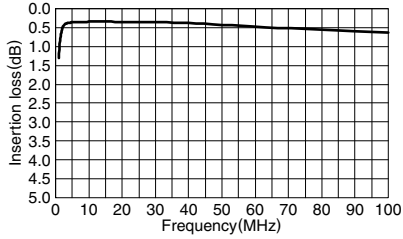


RETURN LOSS

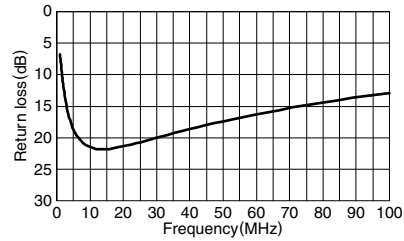

AMPLITUDE UNBALANCE

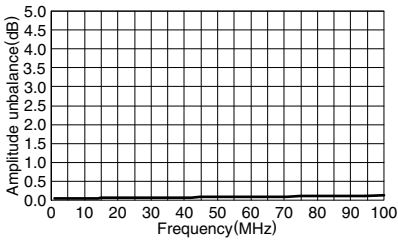

PHASE UNBALANCE

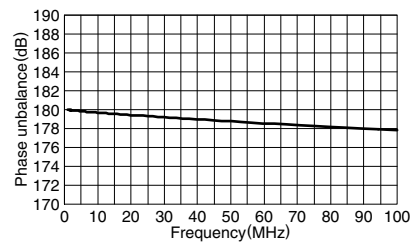

• All specifications are subject to change without notice.

Wound Chip Baluns

Conformity to RoHS Directive

ATB Series ATB3225-75034CT


FEATURES

- Case size of ATB3225 is L3.2×W2.5×H2.3mm.
- This case size is smaller than traditional Balun.
- Frequency band width is 1 to 100MHz.
- Low insertion loss and good balance parameter.
- It is a product conforming to RoHS directive.


APPLICATIONS

Cable modems


SHAPES AND DIMENSIONS

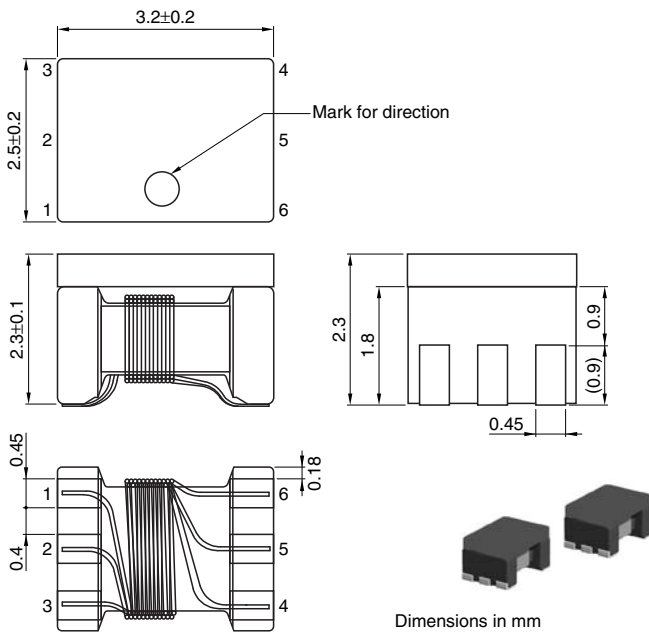

RECOMMENDED PC BOARD PATTERN

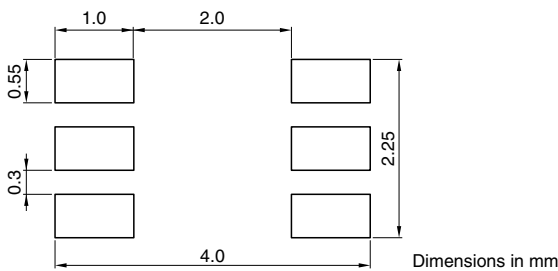

CIRCUIT DIAGRAM

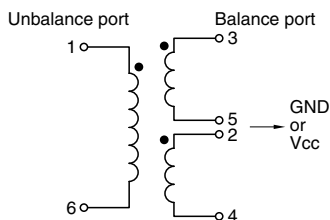

PRODUCT IDENTIFICATION


ATB	3225	-	750	34	CT
(1)	(2)	(3)	(4)	(5)	

- (1) Series name
- (2) Case size
- (3) Impedance[at 100MHz]
750: 75Ω
- (4) Impedance ratio
34 → 3:4
- (5) Type
CT: Center tap


TEMPERATURE RANGES

Operating	-25 to +85°C
Storage(After mount)	-25 to +85°C

RECOMMENDED SOLDERING CONDITIONS RECOMMENDED TEMPERATURE PROFILE FOR LEAD-FREE SOLDER

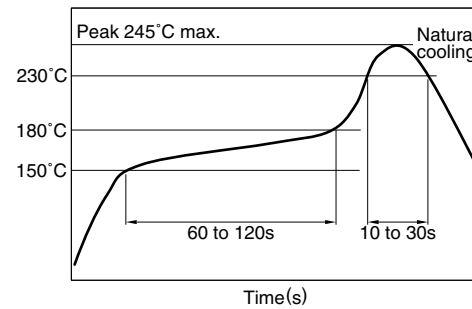

REFLOW PROFILE FOR SOLDER HEAT RESISTANCE

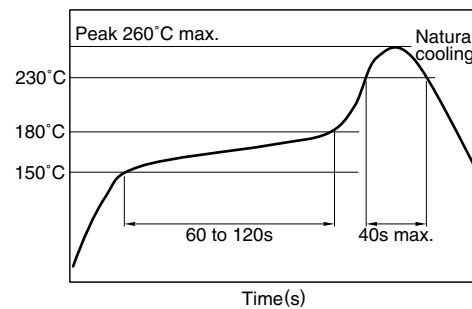

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS


Part No.	DC resistance (Ω)max.	Impedance ratio	Frequency range (MHz)	Insertion loss (dB)		Return loss (dB)min.	Amplitude unbalance (dB)max.	Phase unbalance (deg.)
				typ.	max.			
ATB3225-75034CT	0.7	3:4 (75 Ω :100 Ω)	1 to 100	0.5	2	5	1	180 \pm 10

FREQUENCY CHARACTERISTICS


INSERTION LOSS

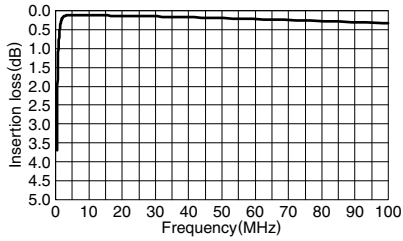

RETURN LOSS

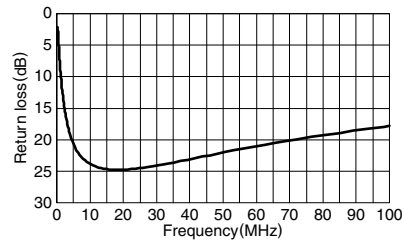

AMPLITUDE UNBALANCE

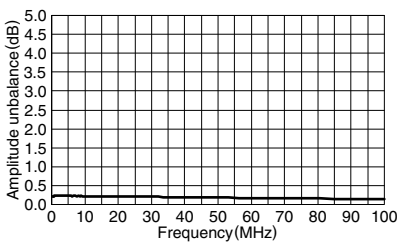

PHASE UNBALANCE

