





A highly flexible, low cost package for RF applications in the 1-30MHz band. The use of vacuum reed switches with rhodium contacts offers high isolation voltages, low contact resistance and long operating lifetime. Additional RF screening is available to further enhance RF performance for more demanding applications.

Available as Form A (SPNO), Form B (SPNC) or latching (bistable) contact configurations with switch connections via either PCB or flying lead.

- **3.5A RF at 1-30MHz**
- **3.5kV Isolation**
- **Contacts Form A, B or Latching**
- **Long Lifetime**

Contact	Units	Conditions	Form A	Form B	Latching
Contact Material			Rhodium	Rhodium	Rhodium
Isolation across contacts	kV	DC or AC peak	3	3	3.5
Max. carry current	A	DC or AC rms	3.5*	3.5*	1.5
Max. switching power	W		10	10	10
Max. switching voltage	V	DC or AC peak	20	20	20
Max. switching current	A	DC or AC peak	0.5	0.5	0.5
Capacitance across contacts	pF	coil/screen grounded	<0.1	<0.1	<0.1
Lifetime	operations	dry switching	10 ⁹	10 ⁹	10 ⁹
Lifetime	operations	10W switching	10 ⁸	10 ⁸	10 ⁸
Contact Resistance	mOhms	maximum (typical)	80 (30)	80 (30)	80 (30)
Insulation Resistance	Ohms	minimum (typical)	10 ¹⁰ (10 ¹³)	10 ¹⁰ (10 ¹³)	10 ¹⁰ (10 ¹³)
ESR at 30MHz (no screen)	mOhms	typical	95 @ 3A rms	95 @ 3A rms	200 @ 1.5A rms
ESR at 30MHz (part screen)	mOhms	typical	80 @ 3A rms	80 @ 3A rms	180 @ 1.5A rms
Coil			5V 12V 24V	5V 12V 24V	5V 12V
Must Operate	V	DC, 20°C	3.5 8 15	3.5 8 15	3 7
Must Release	V	DC, 20°C	1 2 4	1 2 4	N/A N/A
Min Pulse Length	ms		N/A N/A N/A	N/A N/A N/A	2.0 2.0
Operate Time	ms		1.0 1.0 1.0	1.0 1.0 1.0	1.0 1.0
Release Time	ms	diode fitted	0.5 0.5 0.5	0.5 0.5 0.5	1.0 1.0
Resistance	Ohms	20°C	70 380 1500	65 350 1200	188 500
Construction					
Isolation contact to coil	kV	DC or AC peak	3	3	3.5
Capacitance contact to all other terminals	pF	Contacts open	<1.0	<1.0	<1.0
Capacitance contact to all other terminals	pF	Contacts closed	<1.5	<1.5	<1.5
Environmental					
Operating temperature range	°C	Limited Current	-40 to +100*	-40 to +100*	-40 to +100
Storage temperature range	°C		-40 to +125	-40 to +125	-40 to +125
Weight	gm	typical	3.5	4.2	3.1


*see graphical data

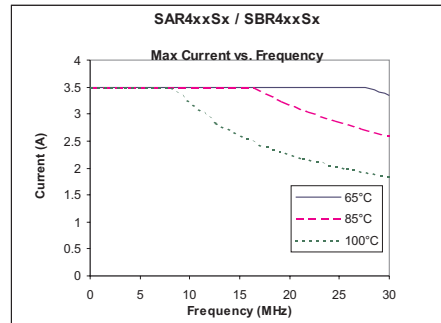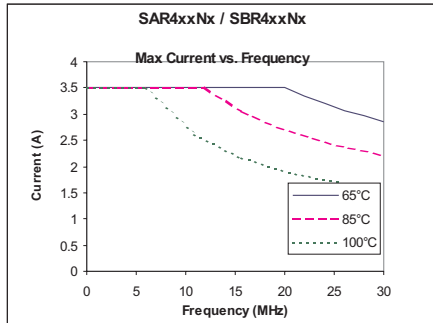

Mechanical Dimensions


All dimensions are in millimeters (inches)

Flying Lead

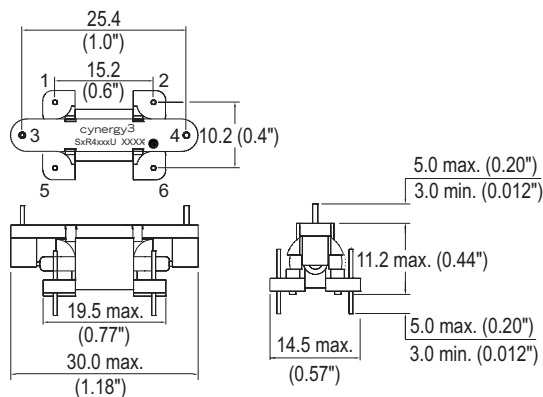


Pins 1, 2, 5, 6 require 0.9mm diameter ± 0.05mm holes


PCB Mount

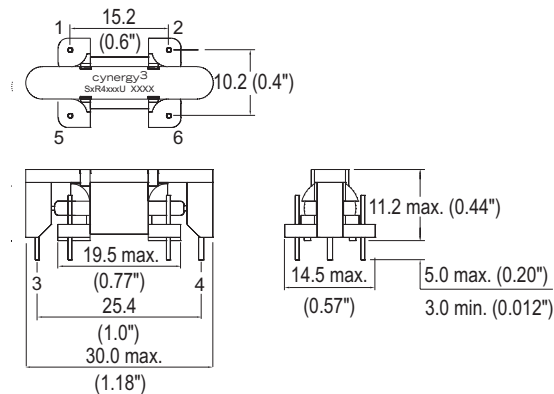


Circuit Diagram, Form A



Circuit Diagram, Form B



Circuit Diagram, Latching

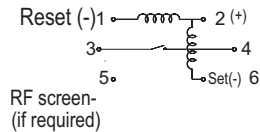

(all circuit diagrams viewed from above)

ISO9001 Certified

USA
 Sales & Tech Support(866) 258-5057
 Email: sales@cynergy3.com
 Cynergy3 Components
 2320 Paseo de las Americas, Suite 104
 San Diego, CA 92154

EUROPE - UK
 Telephone +44 (0) 1202 897969
 Fax +44 (0) 1202 891918
 Email:sales@cynergy3.com
 Cynergy3 Components Ltd.
 7 Cobham Road
 Ferndown Industrial Estate
 Wimborne, Dorset BH21 7PE

ASIA - Thailand
 Telephone +66 (0)2 665 2517
 Fax +66 (0)2 665 2588
 Cynergy 3 Components, Asia
 18/8 Fico Place 12th Floor
 Soi Sukhumvit 21 (Asoke)
 Klongtoey Nua, Wattana
 Bangkok, Thailand 10110